

# 6A20103

LITANG® ETL Verified Category 6A U/UTP Cable, blue jacket, 4 pair count, 1000 ft (305 m) length, reel

## Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	LITANG®
Product Type	Twisted pair cable
Product Brand	LITANG®

## General Specifications


Product Number	6A20103
ANSI/TIA Category	6A
Cable Component Type	Horizontal
Cable Type	U/UTP (unshielded)
Conductor Type, singles	Solid
Conductors, quantity	8
Jacket Color	Blue
Note	Consult ANSI/TIA-568-C.2 Annex G for length de-rating guidance for cable installation in higher temperature environments
Pairs, quantity	4
Separator Type	Isolator
Transmission Standards	ANSI/TIA-568-C.2   ISO/IEC 11801 Class EA

## Dimensions

Cable Length	1000 ft   304.8 m
Diameter Over Jacket, nominal	0.285 in   7.239 mm
Jacket Thickness	0.051 in   1.295 mm
Conductor Gauge, singles	23 AWG

# 6A20103

## Cross Section Drawing

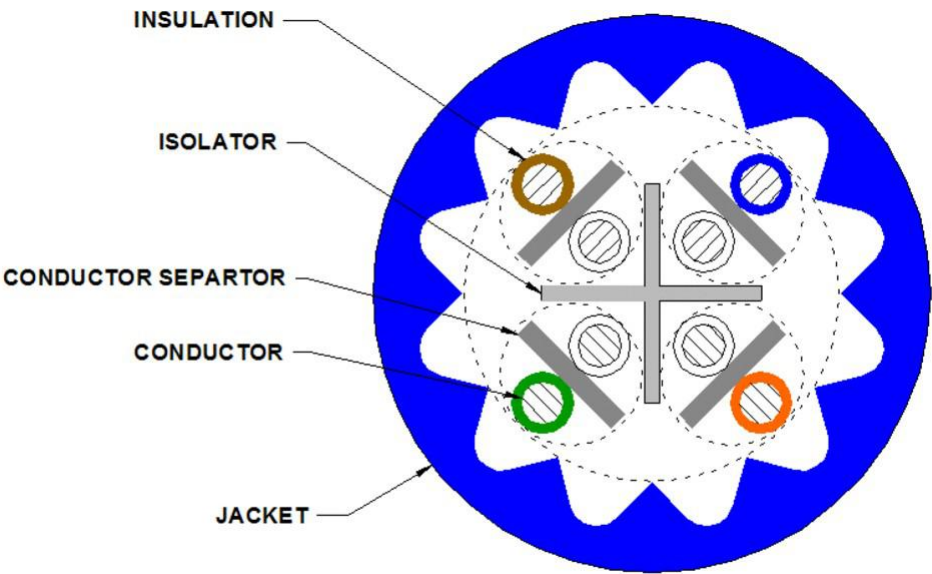

### Electrical Specifications

dc Resistance Unbalance, maximum	4 %
dc Resistance, maximum	7.61 ohms/100 m   2.32 ohms/100 ft
Dielectric Strength, minimum	1500 Vac   2500 Vdc
LP (Limited Power) Rating	0.6 A
Mutual Capacitance at Frequency	6.0 nF/100 m @ 1 kHz
Nominal Velocity of Propagation (NVP)	66 %
Operating Frequency, maximum	550 MHz
Operating Voltage, maximum	80 V
Remote Powering	Fully complies with the recommendations set forth by IEEE 802.3bt (Type 4) for the safe delivery of power over LAN cable when installed according to ISO/IEC 14763-2,

## Material Specifications

Conductor Material	Bare copper
Insulation Material	FEP
Jacket Material	PVC
Separator Material	FEP
Separator 2 Material	Polyolefin

## Mechanical Specifications

Pulling Tension, maximum	25 lb   11.34 kg
--------------------------	------------------

## Environmental Specifications

Installation temperature	0 °C to +60 °C (+32 °F to +140 °F)
Operating Temperature	-20 °C to +75 °C (-4 °F to +167 °F)
Environmental Space	Plenum
Temperature Rating, ETL	105 °C   221 °F
Temperature Rating, UL	105 °C   221 °F
Flame Test Method	CMP
Smoke Test Method	CMP

## Packaging and Weights

Cable weight	40.7 lb/kft   5.627 kg/km
Packaging Type	Reel

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.litangcables.com/ProductCompliance">www.litangcables.com/ProductCompliance</a>
ROHS	Compliant

